

FALCO

AND FALCO TAC, DIFFUSED MODEL



DESIGNED FOR CONDENSING ATMOSPHERES
AND EXTREME WEATHER.

ionscience.com

Unrivalled Gas Detection^{ion}.





FALCO ELIMINATES FALSE READINGS FOUND WITH OTHER COMPETING TECHNOLOGY, GIVING YOU RELIABILITY, ACCURACY AND RESULTS YOU CAN TRUST

Overview

FALCO and FALCO TAC are part of the latest generation of fixed photoionisation detectors (PIDs) from ION Science that continuously detect a wide range of volatile organic compounds (VOCs).

Designed for working in the most extreme conditions, its unique Typhoon Technology safeguards the sensor from condensing humidity while its anti contamination design allows maintenance free operation for extended periods in the harshest environments. FALCO also incorporates ION Science's patented Fence Electrode Technology for the most accurate PID performance over all humidities.

FALCO can operate as a standalone detector with its bright multi-coloured status display and can also be easily integrated into any system via analogue 4-20 mA, Modbus RS-485 and relays.

For ease of maintenance, FALCO can be serviced without the need for removing power or using a hot work permit with no tools. FALCO's easy to navigate, 5 magnetic switch interface with LED confirmation ensures installation, setup and servicing is quick and simple.

FALCO is supplied with a 10.6 eV lamp allowing the instrument to detect a wide range of VOC gases whereas FALCO TAC utilises a 10.0 eV lamp to detect Total Aromatic Compounds (TACs), which helps focus on benzene.

The FALCO and FALCO TAC diffused instruments are ideal for detecting VOCs and TACs in areas such as refineries and petrol chemical facilities.

Extreme Conditions


- Specifically designed for extreme weather
- Built-in Typhoon Technology to stop condensation forming within the PID sensor
- Anti-contamination design
- Ingress protection rating IP65

Ultimate Safety

- Patented fence electrode gives best in class performance over all humidities
- Anti contamination design provides long term accurate results
- Multi-coloured status display visible from 20 metres in direct sunlight
- High visibility OLED display

Ease of maintenance & low cost of ownership

- Easy to navigate unique 5 magnetic button interface
- No pump to replace
- No tools required to field service
- Dual certification allows access to serviceable areas in hazardous zones
- Warranted 10,000 hour lamp life
- Easy to replace electrode stack

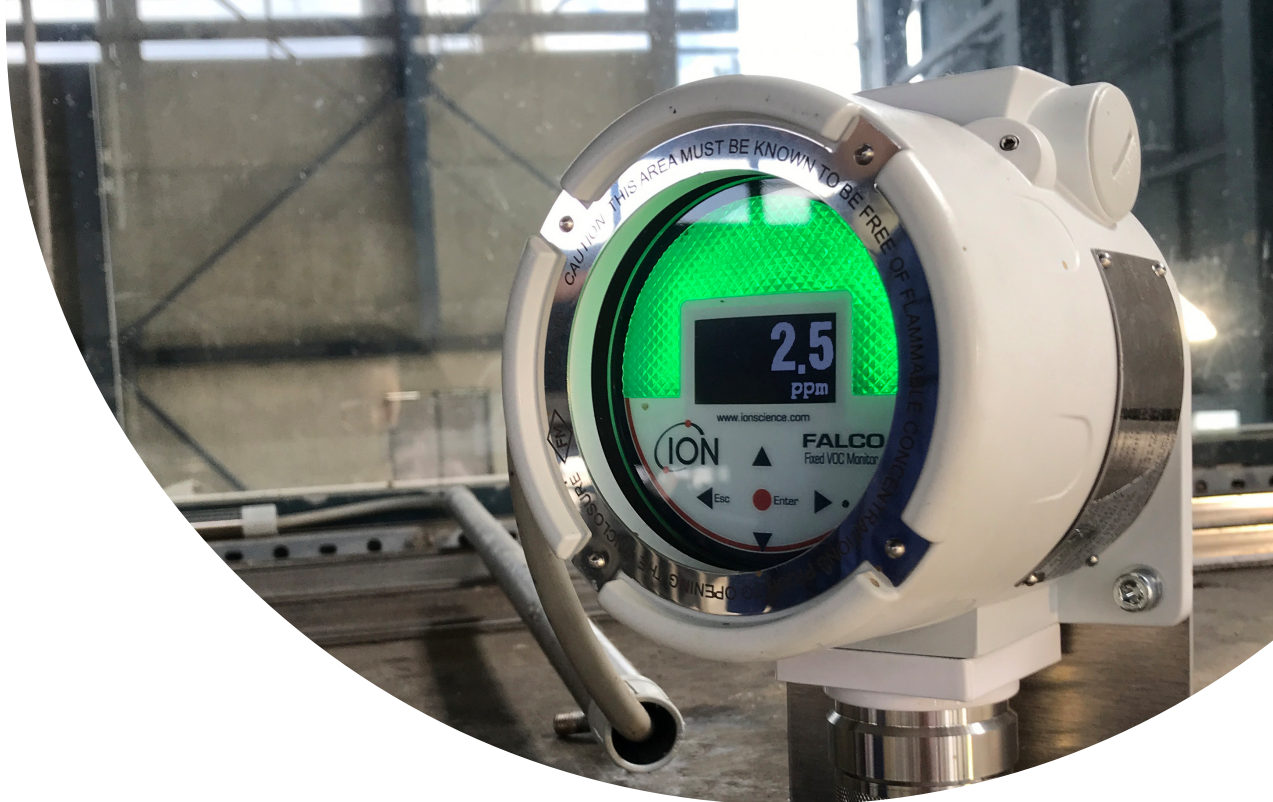

Applications

- Safety
- Industrial hygiene
- Fugitive emissions
- Fence line monitoring
- Air quality monitoring
- Fertility labs
- Glove boxes
- Fume cupboards
- Process control
- HVAC
- Plant shut down & turnaround

Dual Certification

Dual IS and ExD certification allows FALCO to be serviced in hazardous environments without using a hot work permit

Certification	
ATEX	Ex II 2G db ib IIC T4 Gb
UL/CSA	Class 1, Div 1 Groups ABCD T4

Four Detection Ranges

- FALCO and FALCO TAC diffused have four detection ranges

Range (ppm)	0-10	0-50.0	0-1000	0-3000
Sensitivity (ppm)	0.001	0.01	0.1	1
FALCO (10.6 eV)	✓	✓	✓	✓
FALCO TAC (10.0 eV)		✓		

Extend your FALCO warranty

Registering your product online within one month of purchase will extend its warranty.



Diffused 10.6eV model



Diffused TAC (10.0eV) model



Technical specifications

Sensor

- Photoionisation detector

Falco detection ranges and sensitivity with 10.6eV lamp fitted*

- 10.0 ppm, 0.001 ppm
- 50.0 ppm, 0.01 ppm
- 1000 ppm, 0.1 ppm
- 3000 ppm, 1 ppm

Falco TAC detection ranges and sensitivity with 10.0eV lamp fitted*

- 50.0 ppm, 0.01 ppm

Response time (T90)

- Diffused models: <30 seconds**

Accuracy

- $\pm 5\%$ or ± 1 digit

User interface

- OLED high contrast white on black: 128 x 64 pixels
- Screen size: 35 mm (w) x 17.5 mm (h)
- 5 magnetic switches with LED confirmation (up, down, left, right & enter).

Status indicator

- Bright visible status indicator: RED, AMBER, GREEN

Output

- 4 - 20 mA
- 2 programmable relays
- RS 485 Modbus

Falco diffused environmental specification

- Operational temperature: -40 °C to 50 °C 0-100% RH and condensing humidity
- Storage temperature: -40 °C to 60 °C

Ingress Protection

- Main unit: IP65
- Sensor head: IP65

Power

- Working voltage: 12 to 40 Vdc
- Typical 2 W, Max. 7 watts

Mechanical interface

- 2 x cable entry points with 3/4" NPT threads (left and right)

Mounting points

- 2 x M8

Weight & Dimensions

- 2.9 kg
- 205 (h) x 180 (w) x 125 (d) mm

EMC

- EMC Directive 2014/30/EU

Certification

- II 2G db ib IIC T4 Gb
- Class 1, Div 1 Groups ABCD T4
- ISO9001:2015

* All specifications quoted are at calibration point and under the same ambient conditions. Specifications are based on isobutylene calibration at 20 °C and 1000 mBar.

** When set to continuous measurement

Modbus* is a registered trademark of Schneider Electric

FALCO V1.9 This publication is not intended to form the basis of a contract and specification can change without notice.

Manufactured by:

ION Science Ltd

The Hive, Butts Lane,
Fowlmere,
Cambridgeshire,
SG8 7SL, UK

T +44 (0)1763 208503

E info@ionscience.com

"The Ion Science Falco VOC monitor was recommended by a significant player in the oil industry who conducted extensive performance tests and trials at a large refinery where the Falco came out on top. When ExRobotics did testing of its own, we found the Falco to be robust and reliable."

Ian Peerless, Operations Director at Exrobotics

Diensten van EURO-INDEX

EURO-INDEX is fabrikant, importeur en distributeur van diverse A-merken op het gebied van test- en meetinstrumenten. Daarnaast leveren wij een groot aantal diensten om het gebruik van deze instrumenten in uw bedrijfsvoering te optimaliseren. Dit omvat uiteraard onderhoud, reparatie en kalibratie van de instrumenten, maar ook kennisdeling via de EURO-INDEX Academy en verhuur van instrumenten.

Geautoriseerd Service Centrum

EURO-INDEX b.v. is van alle vertegenwoordigde merken een Geautoriseerd Service Centrum. Dit betekent dat uw instrumenten worden behandeld door technici die zijn opgeleid door de fabrikant en beschikken over de juiste gereedschappen en software. Er worden uitsluitend originele onderdelen toegepast en de garantie van uw instrument, evenals de certificering (ATEX, EN50379, etc.) blijven intact.

Kalibratielaboratorium

Ons moderne service- en kalibratielaboratorium beschikt over een RvA accreditatie naar NEN-EN-ISO/IEC 17025. Deze accreditatie geldt voor grootheden, zoals gespecificeerd in de scope bij accreditatienummer K105.



Kijk voor een overzicht van al onze diensten op euro-index.nl/diensten



Mobiele Service

Naast de vaste kalibratielaboratoria in Capelle aan den IJssel en Zaventem beschikken wij ook over laboratoria op wielen met de naam "Mobiele Service". Dit biedt vertrouwde service en kwaliteit, bij u voor de deur!

KWS®

KWS® is een uniek servicesysteem voor uw meetinstrumenten met periodiek onderhoud en kalibratie tegen vaste, lage kosten. Uw kalibratiecertificaten zijn digitaal beschikbaar via Mijn KWS (gratis webportaal en app).

Verhuur van meetinstrumenten

- Uitgebreid assortiment
- Nauwkeurigheid aantoonbaar door actueel kalibratiecertificaat
- Deskundig advies
- Complete levering inclusief accessoires

EURO-INDEX Academy

- Trainingen (individueel en klassikaal)
- Cursussen en workshops
- Demonstratie- en instructievideo's
- Whitepapers



Servicebalie



Onderhoud, reparatie en kalibratie



Cursussen en workshops



Mobiele Service

Wijzigingen voorbehouden EURO-INDEX® NL 24005



NETHERLAND
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: 010 - 2 888 000
F: 010 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl



BELGIË
Leuvensesteenweg 607
1930 Zaventem
T: +32 - (0)2 - 757 92 44
F: +32 - (0)2 - 757 92 64
info@euro-index.be
www.euro-index.be