

A detailed view of the Gasclam 2 Ground Gas Monitor, a cylindrical device with a metallic top section featuring several screws and a black probe extending downwards. It is positioned diagonally across the right side of the image.

GASCLAM[®] 2

GROUND GAS MONITOR

THE WORLD'S FIRST CONTINUOUS,
BOREHOLE GAS MONITOR.

ionscience.com

Unrivalled Gas Detection^{ion}.





GASCLAM 2 IS A UNIQUE IN-BOREHOLE GAS MONITORING SYSTEM DEVELOPED FOR UNATTENDED COLLECTION OF LONG-TERM, REAL-TREND GROUND-GAS DATA.

Key Features

- Continuous gas (methane, carbon dioxide, oxygen, hydrogen sulphide and VOC) monitoring with configurable logging intervals.
- Continuous atmospheric and borehole pressure monitoring with configurable logging intervals.
- Battery powered deployment for over 3 months (dependant on logging frequency)
- External power option for extended deployments.
- Intrinsically safe for use in explosive atmospheres.
- Discrete installation.


Key Benefits

- Optimised site management with insights from continuous monitoring.
- Improved site characterisation and event flagging helps reduce risks.
- Demonstrates regulatory compliance and due diligence.
- Supports an industry recognised best practice approach to ground-gas monitoring.
- Aids selection of cost effective solutions

Ease of Use

- Fits in to standard 50 mm/2" borehole
- Reduces number of site visits
- Simple PC software to download and analyse data.



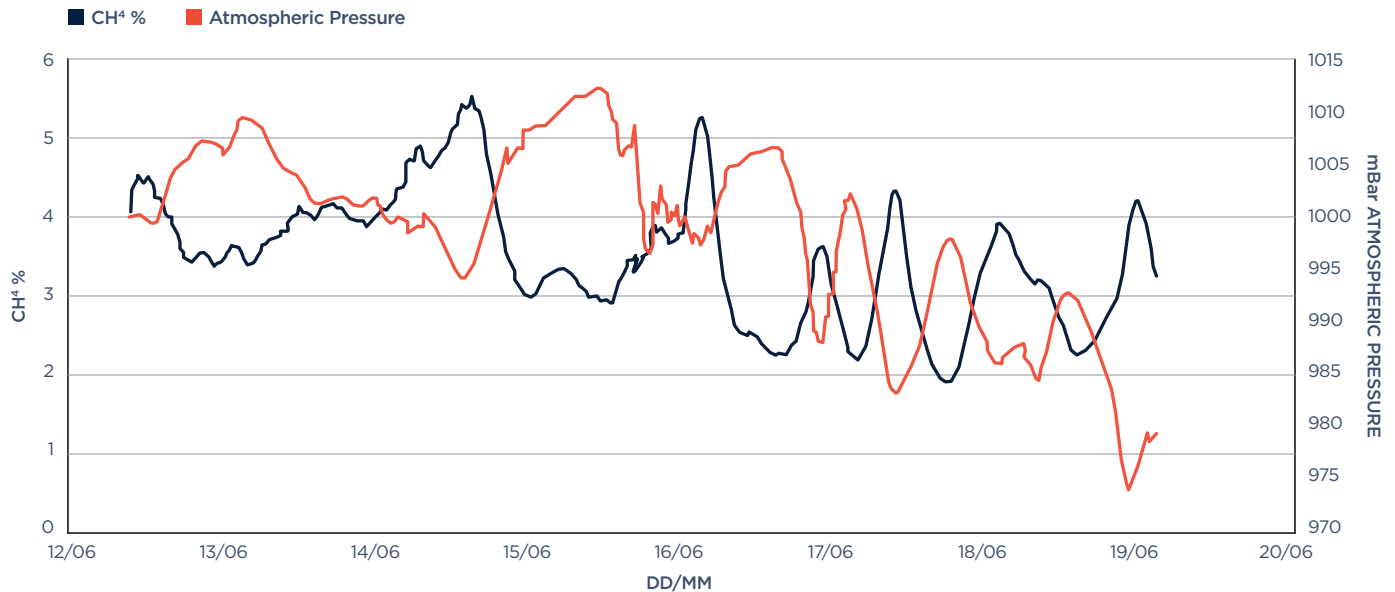

Continuous ground gas monitoring

Using spot measurements to understand ground-gas can lead to uncertain or misleading results. Uncertainty exists as concentrations change over time and spot sampling only provides a snap shot of the ground gas at that instant.

Considerable published material from experts who measure ground-gas and perform risk assessments, question whether traditional methods of collecting data are adequate. The need for real time of data was the reason for developing the patented GasClam 2.

GasClam 2 continuously measures and collects ground gas concentration data as well as parameters that are known to control it - subsurface pressure, atmospheric pressure, water level and temperature.

In combination, this data reduces uncertainty by providing the full picture of what is happening below ground. Also by observing the process controlling the ground gas regime you can predict how it will change in the future.

Using GasClam 2, therefore, provides multiple financial benefits. The first saving comes from reducing the number of site visits by a field engineer.

The second saving comes from reducing the overall length of monitoring programmes as legislative data requirements can be met quicker.

The third, and largest saving, is made by designing appropriate, rather than over engineered solutions based on complete and robust data.

Applications include

- Brownfield site investigation
- Landfill perimeter monitoring and control
- Shale and Coal Bed Methane/ Seam Gas site monitoring
- Vapour intrusion studies
- Waste Management
- Refineries and petroleum storage monitoring

Accessories

- External power supply cable
- External power supply / communication adaptor
- External water level sensor



Technical specifications

GAS	METHOD/TYPE	RANGE	RESOLUTION	ACCURACY
CO ₂ **	Infrared	0-100%	1% above 50% 0.5% below 50%	± 2% FSD
CO ₂ **	Infrared	0-5%	0.05% above 2.5% 0.025 below 2.5%	± 2% FSD
CH ₄ **	Infrared	0-100%	1% above 50% 0.5% below 50%	± 2% FSD
CH ₄ **	Infrared	0-5%	0.05% above 2.5% 0.025 below 2.5%	± 2% FSD
O ₂	Electrochemical	0-25%	0.1 %	± 5% of reading ± 1 digit
CO*	Electrochemical	0-2000 ppm	1 ppm	<± 3 ppm at 0 ± 5% at 250 ppm ± 10% full scale
H ₂ S*	Electrochemical	0-100 ppm	1 ppm	<± 1 ppm at 0 ± 2.5% at 50 ppm
VOC*	PID	0-4000 ppm	1 ppm	± 5% of reading ± 1 digit
DUAL CO/H2S				
CO	Electrochemical	0-500 ppm	1 ppm	<± 3 ppm at 0 ± 3% at 250 ppm
H2S	Electrochemical	0-200ppm	1ppm	<± 1ppm at 0 ± 2% at 100 ppm

ENVIRONMENTAL	METHOD/TYPE	RANGE	RESOLUTION
Barometric Pressure	Piezoelectric	800 to 1250 mBar	1 mBar
Borehole Pressure	Piezoelectric	800 to 1250 mBar	1 mBar
Temperature	Internal Chip	-5°C to +50°C or 22°F to 122°F	0.1°C or 1°F
Water depth*	Piezoelectric	0-25m (Various available)	0.01 m

POWER OPTIONS	Internal: Option of Lithium primary cells or Duracell Alkaline D-Cells or Rechargeable battery pack External: Accepts intrinsically safe external power supply for extended and/or rapid monitoring	
Typical Battery Life (hourly sampling)	Lithium primary cells Alkaline cells Rechargeable battery pack	3 months 1 month 3 weeks
Case	High quality stainless steel	
Weight	7.5 kg (16.8 lbs)	
Dimensions	Overall length: 90cm (35.4 in) — Borehole tube length: 83cm (32.6 in) Head diameter: 11cm (4.3 in) — Borehole tube diameter: 4.7cm (1.85 in)	
Protection	IP68 rated (continuous submersion)	
Operation Temp.	-20°C to +50°C (-4°F to 122°F)	
Approvals	EMC, ATEX 0105 X CE  II 2G Ex d ib [ib] IIB T4 Gb IECEx Ex d ib [ib] IIB T4 Gb CSA C (US & Canadian Approvals) Class 1, Zone 1 (A)Ex d id IIB T4	
Patents	European and World-wide Patented	

GasClam 2 V1.1 This publication is not intended to form the basis of a contract and specifications can change without notice.

European patent granted / Worldwide patent granted.
 Exclusively sold and promoted by Ion Science Ltd.
 GasClam 2® is a registered trademark of Intelisys Ltd T/A Salamander Group.

* Optional; ** Choice of 2 IR sensors, specify on order.

Distributed by:

ION Science Ltd
 The Hive, Butts Lane,
 Fowlmere,
 Cambridgeshire,
 SG8 7SL, UK
 T +44 (0)1763 208503
 E info@ionscience.com

Diensten van EURO-INDEX

EURO-INDEX is fabrikant, importeur en distributeur van diverse A-merken op het gebied van test- en meetinstrumenten. Daarnaast leveren wij een groot aantal diensten om het gebruik van deze instrumenten in uw bedrijfsvoering te optimaliseren. Dit omvat uiteraard onderhoud, reparatie en kalibratie van de instrumenten, maar ook kennisdeling via de EURO-INDEX Academy en verhuur van instrumenten.

Geautoriseerd Service Centrum

EURO-INDEX b.v. is van alle vertegenwoordigde merken een Geautoriseerd Service Centrum. Dit betekent dat uw instrumenten worden behandeld door technici die zijn opgeleid door de fabrikant en beschikken over de juiste gereedschappen en software. Er worden uitsluitend originele onderdelen toegepast en de garantie van uw instrument, evenals de certificering (ATEX, EN50379, etc.) blijven intact.

Kalibratielaboratorium

Ons moderne service- en kalibratielaboratorium beschikt over een RvA accreditatie naar NEN-EN-ISO/IEC 17025. Deze accreditatie geldt voor grootheden, zoals gespecificeerd in de scope bij accreditatienummer K105.



Kijk voor een overzicht van al onze diensten op euro-index.nl/diensten



Mobiele Service

Naast de vaste kalibratielaboratoria in Capelle aan den IJssel en Zaventem beschikken wij ook over laboratoria op wielen met de naam "Mobiele Service". Dit biedt vertrouwde service en kwaliteit, bij u voor de deur!

KWS®

KWS® is een uniek servicesysteem voor uw meetinstrumenten met periodiek onderhoud en kalibratie tegen vaste, lage kosten. Uw kalibratiecertificaten zijn digitaal beschikbaar via Mijn KWS (gratis webportaal en app).

Verhuur van meetinstrumenten

- Uitgebreid assortiment
- Nauwkeurigheid aantoonbaar door actueel kalibratiecertificaat
- Deskundig advies
- Complete levering inclusief accessoires

EURO-INDEX Academy

- Trainingen (individueel en klassikaal)
- Cursussen en workshops
- Demonstratie- en instructievideo's
- Whitepapers



Servicebalie



Onderhoud, reparatie en kalibratie



Cursussen en workshops



Mobiele Service

Wijzigingen voorbehouden EURO-INDEX® NL 24005



NETHERLAND
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: 010 - 2 888 000
F: 010 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl



BELGIË
Leuvensesteenweg 607
1930 Zaventem
T: +32 - (0)2 - 757 92 44
F: +32 - (0)2 - 757 92 64
info@euro-index.be
www.euro-index.be