

DET2/3

Advanced Earth (Ground) Tester



- **High resolution of 1 mΩ, ideal for large earth (ground) systems**
- **Versatile test modes**
- **High accuracy for earth (ground) electrode grid and soil resistivity tests**
- **Rechargeable battery power that can last all day with a fast re-charge (up to 10 hours)**
- **Robust instrument with IP65 protection**
- **Automatic test frequency selection, with filters and high current features**
- **Diagnostic trace display**
- **Data storage**
- **Large colour display that shows numeric and graphical results**

DESCRIPTION

The Megger® DET2/3 automatic earth (ground) test instrument is robust, compact and designed to measure earth Electrode Resistance and Soil Resistivity. It provides a full range of test methods and excels at the four terminal method of measurement, which eliminates the resistance of the current circuit from the measurement.

The DET2/3 is a reliable instrument for use on large or more complex earth systems, which include communications earth systems and difficult test environments. It can be used to test in accordance with BS 7430 (earthing / grounding), BS-EN-62305 (Lightning Protection), IEEE Standard 81 and Railway Applications.

Soil Resistivity measurements are used to establish the optimum electrode design and site, as well as archaeological and geological investigations.

FEATURES

High accuracy earth (ground) measurements

The DET2/3 provides accurate 1 mΩ resolution measurements of earth (ground) electrode resistance.

With its microprocessor controlled system it provides a flexible and 'user-friendly' approach to earth tests by the provision of excellent error detection capabilities and full test information shown on a large colour display.

Test frequency, test voltage and filtering can be quickly and easily adjusted so that adverse conditions, which can influence the test, can be overcome.

A wide band of test frequencies, with a resolution of 0.5 Hz, can be used to eliminate errors caused by noise in the earth.

The DET2/3 also includes an automatic frequency selection feature that scans for frequencies with the lowest noise level and then runs a test at that frequency.

Continuity measurements and bonding


- **Single resistance range:** One fully automatic range from 0.01 Ω to 1.0 kΩ
- **Display:** Three digit display
- **Accuracy:** ±3% (±2 digits)
- **Short circuit current:** 200 mA continuity test currents
- **Lead null:** Lead resistance compensation (NULL) operates with a lead resistance up to 10 Ω

Trace display and data storage

Utilising the latest processors, the DET2/3 can provide a live trace of its measurements, which graphically shows the amount of noise from the system under test - a powerful diagnostic tool for the expert earth (ground) test engineer.

Use of the latest processors and a large internal memory allows for immediate calculations of resistivity (Wenner or Schlumberger method) and the ability to save a complete day's worth of test results.

Test result data can be downloaded directly through a USB flash drive or straight to a Windows PC running PowerDB™ software.

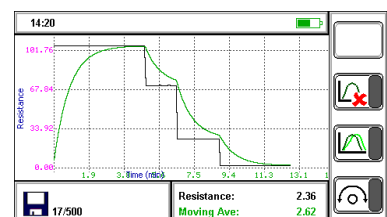

DET2/3

Advanced Earth (Ground) Tester

Weatherproof and rugged

The DET2/3 is sealed to IP54 standard, which provides weatherproofing during operation (case lid open). When the case lid is closed its protection standard is to IP65 (water and dust damage).

The case is made of a tough and light copolymer polypropylene, which can withstand the rough and tumble of outdoor use.

Portable power

An internal Li-ion battery provides for a full day of tests.

The Li-ion battery has a fast recharge facility that allows a flat battery to provide an afternoon of tests, if charged during a lunch break.

The DET2/3 can also operate from a standard 12 V DC battery supply.

SPECIFICATION

2, 3 and 4 pole resistance measurements

Range	0.001 Ω to 20.00 k Ω auto range
Display	Four digit display
Accuracy	at 23 $^{\circ}\text{C}$ $\pm 0.5\%$ of reading ± 2 digits
3P	$\pm 10 \text{ m}\Omega$
2P	$\pm 20 \text{ m}\Omega$

Operational uncertainty	$\pm 2\%$ of reading, ± 2 digits (meets IEC61557 operational uncertainty requirement with readings over 10 m Ω) when spike resistances are below 100 Ω $\pm 5\%$ of reading, ± 2 digits $\pm 10 \text{ m}\Omega$ (meets IEC61557 operational uncertainty requirement with readings over 50 m Ω)
-------------------------	---

Test standards	BS 7430 (Earthing) BS 62305 (Lightning) BS EN50122 (Railway) IEEE Standard 81
----------------	--

Test frequency 2P, 3P & 4P resistivity	10 Hz to 200 Hz in steps of 0.5 Hz
--	------------------------------------

Test frequency dual clamp, 3p ART & 4P ART	70 Hz to 200 Hz (steps of 0.5 Hz)
--	-----------------------------------

Test current	50 mA max.
Maximum output voltage	Less than 50 V rms
Maximum interference	Up to 50 V pk to pk

3 and 4 pole ART (selective) resistance measurements

Range	0.01 Ω to 10.00 k Ω Auto range
Accuracy	$\pm 5\%$ of reading ± 3 digits at 23 $^{\circ}\text{C} \pm 2^{\circ}\text{C}$

Stakeless resistance measurement

Range	0.01 Ω to 200 Ω
Accuracy	$\pm 7\%$ accuracy, ± 3 digits @ 128 Hz

Continuity

Range	0.01 Ω to 1 k Ω (3 digits)
Accuracy	$\pm 3\%$ (± 2 digits)
Test Current	12 V, 205 mA
Lead Null	< 10 Ω

Leakage current

Range	0.00 A to 2.00 A
Accuracy	$\pm 5\%$ (± 3 digits)

Instrument specifications

Display	5.25 inch QWVGA, daylight viewable backlit colour
---------	---

Operating temperature and humidity

	-10 to 40 $^{\circ}\text{C}$ 90% RH max at 40 $^{\circ}\text{C}$
--	---

Storage temperature	-20 to 60 $^{\circ}\text{C}$
---------------------	------------------------------

Temperature coefficient	< $\pm 0.1\%$ per $^{\circ}\text{C}$ over operating temp
-------------------------	--

Altitude	Up to 2000 m above sea-level.
----------	-------------------------------

IP rating	IP54 operational (lid open), IP65 storage (lid closed)
-----------	---

Measurement rating	CAT IV 300 V
--------------------	--------------

Measurement output rating	50 V, 50 mA ac (Switching dc)
---------------------------	-------------------------------

Power supply	Internal Li-ion battery or external 12-18 V, 65 W, DC supply
--------------	--

Battery life	Up to 10 hrs use
--------------	------------------

Battery charging time	Fast recharge to 50%, 3 hrs for 100%
-----------------------	---

Ambient temperature (battery charge)	0 - 40 $^{\circ}\text{C}$
--------------------------------------	---------------------------

Safety	Meets IEC 61010
--------	-----------------

EMC	Meets IEC 61326
-----	-----------------

Dimensions	L 315 x W 285 x H 181 mm (12.4 x 11.2 x 7.1 in)
------------	--

Weight	4.5 kg (9.9 lb)
--------	-----------------

Data download	To PC through USB 2.0
---------------	-----------------------

Data storage	On board 500 record storage downloadable as *.txt
--------------	--

USB type A	Data download to USB drive
------------	----------------------------

USB type B	Data download to PC
------------	---------------------

Secondary measurement display

	Noise, voltage and current
--	----------------------------

Resistivity calculation	Wenner: $PE = 2 \pi a R_w$ Schlumberger: $PE = \pi \frac{b(b+a)}{a} R$
-------------------------	--

Test modes	Internally set 2P, 3P, ART (Selective), 4P, Stakeless (clamp) modes
------------	---

Aux inputs	MCC1010, MVC1010
------------	------------------

RoHS compliant	Yes
----------------	-----

DET2/3

Advanced Earth (Ground) Tester

ACCESSORIES

MCC1010 and MVC1010

- For Stakeless tests
- For ART tests

Cable reels with spike

- Sturdy handle and a smooth unwind and wind action
- Cable 'feed through'
- 20 m, 30 m, 50 m, 60 m or 100 m cables
- Attachable 25 cm (10") earth spike
- Spike can be hammered into the ground
- Unique daisy-chain feature to create longer lengths

Continuity test cables and clips

- 1.4 m cables
- 2 wire connection cable
- Crocodile clips
- Probes

Accessories bag

- Holds a full suite of accessories
- Water resistant
- Toughened bottom for outdoor use

	DET2/3	DET2/3 with ETK50 C	DET2/3 with ETK100 C
DET2/3	■	■	■
Charger	■	■	■
MCC1010, current clamp		■	■
MVC1010, voltage clamp		■	■
User guide	■	■	■
Calibration checker, instrument	■	■	■
Calibration checker, clamps		■	■
Reel with 50 m test cable (x2)		■	
Reel with 30 m test cable (x2)		■	
Reel with 100 m test cable (x2)			■
Reel with 60 m test cable (x2)			■
Test spikes (x4)		■	■
100 m tape measure			■
1.4 m leads with connectors and clips (x2)		■	■
Pouch	■	■	■
Carry strap	■	■	■

DET2/3

Advanced Earth (Ground) Tester

		ETK30 1010-176	ETK50 1010-177	ETK100 1010-178	ETK50C 1010-179	ETK100C 1010-180
Test lead on reel	Red	30 m	50 m	100 m	50 m	100 m
	Yellow	20 m	50 m	100 m	50 m	100 m
	Black		30 m	60 m	30 m	60 m
	Green		30 m	60 m	30 m	60 m
Test lead 2 m with croc clip black		■				
Earth test spikes *		2	4	4	4	4
Interconnection lead (Reel to spike) *	Red	■	■	■	■	■
	Yellow	■	■	■	■	■
	Black		■	■	■	■
	Green		■	■	■	■
MCC1010					■	■
MCC1010 test lead					■	■
MVC1010					■	■
MVC1010 test lead					■	■
1.4 m leads with connectors and clips (x2)					■	■
Measuring tape			100 m	100 m	100 m	100 m
Holdall to contain kit		■	■	■	■	■

* Supplied with reels

ORDERING INFORMATION

Model name Cable Reel Language Plug/Mains lead

D	E	T	2	3			-	E	T	K				-	L	G		-	P	
---	---	---	---	---	--	--	---	---	---	---	--	--	--	---	---	---	--	---	---	--

SELECT A MODEL

DET2/3

EARTH TESTING KIT

NONE

ETK 50CX

ETK 100C

SELECT A LANGUAGE AND PLUG

Please note only some plug types are available for certain languages - the language you need will determine the mains leads available

LANGUAGE		PLUG TYPES AVAILABLE							
3 DIGIT CODE	LANGUAGE INCLUDED								
LG1	EN, DE, FR, NL	P1	P2	-	P4	P5	-	-	-
LG2	EN, ES, PT, IT	P1	P2	P3	-	-	P6	-	-
LG3	EN, AR, TR, FR	P1	P2	P3	-	-	-	P7	-
LG4	EN, CZ, SK, PL	P1	P2	-	-	-	-	-	-
LG5	EN, CN, JA, KO	P1	P2	P3	-	-	-	-	P8
LG6	EN, RU, HU, RO	-	P2	-	-	-	-	-	-
LG7	EN, NO, SV, FI	-	P2	-	-	-	-	-	-

ACCESSORIES

Optional accessories

Order code

Cable reel kit ETK30	1010-176
Cable reel kit ETK50	1010-177
Cable reel kit ETK100	1010-178
Cable reel kit ETK50C	1010-179
Cable reel kit ETK100C	1010-180

Optional accessories

Order code

Clamp MCC1010	1010-516
Clamp MVC1010	1010-518
12 VDC power lead	1004-183
Terminal adapter, detachable retro-fit for C1, P1, P2, C2 connectors	1012-511
Power supply 18V73-5A	1010-793

SALES OFFICE

Megger Limited
Archcliffe Road Dover
CT17 9EN England
T +44 (0) 1304 502101
E UKsales@megger.com

DET23_DS_en_V05

www.megger.com
ISO 9001
The word 'Megger' is a registered trademark

Megger

Diensten van EURO-INDEX

EURO-INDEX is fabrikant, importeur en distributeur van diverse A-merken op het gebied van test- en meetinstrumenten. Daarnaast leveren wij een groot aantal diensten om het gebruik van deze instrumenten in uw bedrijfsvoering te optimaliseren. Dit omvat uiteraard onderhoud, reparatie en kalibratie van de instrumenten, maar ook kennisdeling via de EURO-INDEX Academy en verhuur van instrumenten.

Geautoriseerd Service Centrum

EURO-INDEX b.v. is van alle vertegenwoordigde merken een Geautoriseerd Service Centrum. Dit betekent dat uw instrumenten worden behandeld door technici die zijn opgeleid door de fabrikant en beschikken over de juiste gereedschappen en software. Er worden uitsluitend originele onderdelen toegepast en de garantie van uw instrument, evenals de certificering (ATEX, EN50379, etc.) blijven intact.

Kalibratielaboratorium

Ons moderne service- en kalibratielaboratorium beschikt over een RvA accreditatie naar NEN-EN-ISO/IEC 17025. Deze accreditatie geldt voor grootheden, zoals gespecificeerd in de scope bij accreditatienummer K105.



Kijk voor een overzicht van al onze diensten op euro-index.nl/diensten



Mobiele Service

Naast de vaste kalibratielaboratoria in Capelle aan den IJssel en Zaventem beschikken wij ook over laboratoria op wielen met de naam "Mobiele Service". Dit biedt vertrouwde service en kwaliteit, bij u voor de deur!

KWS®

KWS® is een uniek servicesysteem voor uw meetinstrumenten met periodiek onderhoud en kalibratie tegen vaste, lage kosten. Uw kalibratiecertificaten zijn digitaal beschikbaar via Mijn KWS (gratis webportaal en app).

Verhuur van meetinstrumenten

- Uitgebreid assortiment
- Nauwkeurigheid aantoonbaar door actueel kalibratiecertificaat
- Deskundig advies
- Complete levering inclusief accessoires

EURO-INDEX Academy

- Trainingen (individueel en klassikaal)
- Cursussen en workshops
- Demonstratie- en instructievideo's
- Whitepapers



Servicebalie



Onderhoud, reparatie en kalibratie



Cursussen en workshops



Mobiele Service

Wijzigingen voorbehouden EURO-INDEX® NL 24005



NETHERLAND
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: 010 - 2 888 000
F: 010 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl



BELGIË
Leuvensesteenweg 607
1930 Zaventem
T: +32 - (0)2 - 757 92 44
F: +32 - (0)2 - 757 92 64
info@euro-index.be
www.euro-index.be