



LM-100 Light Meter

The Amprobe LM-100 light meter measures the visible light from fluorescent, metal halide, high-pressure sodium or incandescent sources. It is a portable, easy-to-use digital light meter designed for simple one-hand operation reading in Lumen (lux) or footcandle (fc) units. The LM-100 measures a wide range of light up to 20,000 fc or lux with an accurate, high resolution of 0.01 fc/lux.

Use the LM-100 light meter to measure the illumination level in the interior and to switch off or reduce or increase the output level of lighting fixtures. Reduce the energy burden of the building by significantly increasing the efficiency of its lighting system.

One lux is the illumination from a one candela lamp perpendicular to a surface one meter squared at a distance of one meter. One fc is the illumination from a one candela lamp perpendicular to a surface one foot squared at a distance of one foot. 1 footcandle = 10.764 lux and 1 lux = 0.09290 footcandles

No hassle warranty

No waiting.

*No shipping
charges.*



Our commitment to high-quality products and customer service is demonstrated by our industry exclusive "No Hassle" warranty. In the unlikely event that an Amprobe Test Tool requires warranty service, any of our local dealers are authorized to replace it, on the spot.

(note: €500 MSLP limit)

- Measure in Lux or Footcandles, front panel switchable
- Measuring Range to 20,000 Lux or Foot candles
- Silicon photodiode sensor and filter
- Data Hold to freeze reading on the digital display
- MIN / MAX ability to show high and low readings
- Auto Power Off to save battery life
- Includes protective sensor cap
- Large, 3-1/2 digit display

LM-100 Light Meter

Data Sheet

Specifications

Illumination	Accuracy at 23°C ± 5°C (73.4°F ± 5°F), < 75% R.H.	
Sensor	Silicon photodiode and filter	
Measurement rate	2.5 times per second	
Range	20, 200, 2000, 20000, 200000 Lux 20, 200, 2000, 20000 Foot candles	
Accuracy	± 3% (Calibrated to standard incandescent lamp at 2854°K) 6% other visible light sources	
	Angle deviation from cosine	Characteristics
	30°	± 2%
	60°	± 6%
	80°	± 25%
	Cosine Angular corrected per JIS C 1609:1993 and CNS 5119 general A class	
	Resolution	0.01 fc/lux

General Specifications

Display	3¾ digit liquid crystal display (LCD) with a maximum reading of 1999
Sampling Rate	2.5 times per second for digital display
Polarity	Automatic, positive implied, negative polarity indication
Overrange	(OL) or (-OL) is displayed
Zero	Automatic
Low battery indication	The "E3" is displayed when the battery voltage drops below the operating level
Temperature / Humidity	Operating -10°C to 50°C (14°F to 122°F), 0 to 80%RH Storage -10°C to 50°C (14°F to 122°F), 0 to 70%RH
Altitude	2000m, indoor operation
Power Supply	9V NEDA 1604, IEC 6F22, JIS 006P battery
Battery life	200 hours
Auto Power Off	approx 6 min
Dimension (Base)	130 x 63 x 38 mm (5.1 x 2.5 x 1.5")
Dimension (Sensor)	80 x 55 x 29 mm (3.2 x 2.2 x 1.1")
Weight	220 g (.48 lb.) include battery

Agency Approvals & Certifications




EN61326-1 This product complies with requirements of the following European Community Directives: 89/336/EEC (Electromagnetic Compatibility) and 73/23/EEC (Low Voltage) as amended by 93/68/EEC (CE Marking). However, electrical noise or intense electromagnetic fields in the vicinity of the equipment may disturb the measurement circuit. Measuring instruments will also respond to unwanted signals that may be present within the measurement circuit. Users should exercise care and take appropriate precautions to avoid misleading results when making measurements in the presence of electronic interference.

Amprobe® Test Tools
 website: www.Amprobe.com
 email: info@amprobe.com
 Everett, WA 98203
 Tel: 877-AMPROBE

Amprobe® Test Tools Europe
 Amprobe Test Tools Europe
 Beha-Amprobe GmbH
 In den Engematten 14
 79286 Glottertal, Germany
 Tel.: +49 (0) 7684 8009 - 0

Service van EURO-INDEX b.v.

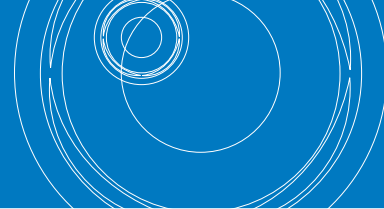

EURO-INDEX b.v. verleent service op alle meetinstrumenten uit haar leveringspakket en biedt de faciliteiten, kennis en hoog gekwalificeerd personeel voor (preventief) onderhoud, reparatie en kalibratie van uw meetinstrumenten.

Geautoriseerd Service Centrum

EURO-INDEX b.v. is van alle vertegenwoordigde merken een Geautoriseerd Service Centrum.

Dit betekent dat uw instrumenten worden behandeld door goed opgeleid en kundig personeel, dat beschikt over de juiste gereedschappen en software. Er worden uitsluitend originele onderdelen toegepast en de garantie van uw instrument, evenals de certificering (ATEX, EN50379, etc.) blijven intact.

Service en kalibratielaboratorium

EURO-INDEX b.v. beschikt over een bijzonder modern service- en kalibratielaboratorium met RvA accreditatie naar NEN-EN-ISO/IEC 17025. Deze accreditatie geldt voor verschillende grootheden, zoals gespecificeerd in de scope bij accreditatienummer K105.



Bekijk de video en ontdek alles over KWS

KWS®

KWS is een uniek servicesysteem voor uw meetinstrumenten met periodiek onderhoud en kalibratie. Veel zaken worden voor u geregeld, zodat u zonder zorgen gebruik kunt maken van uw meetinstrumenten. De kosten zijn laag en voorspelbaar.

Digitale toegang tot uw kalibratiecertificaten met Mijn KWS

Via het Mijn KWS webportal heeft u altijd en overal beschikking over uw kalibratiecertificaten en gerelateerde documenten.

Verhuur van meetinstrumenten

- Uitgebreid assortiment
- Deskundig advies
- Instrumenten worden geleverd met accessoirepakket en herleidbaar kalibratiecertificaat

EURO-INDEX Academy

- Producttrainingen (individueel en klassikaal)
- Seminars
- Demonstratie- en instructievideo's



Servicebalie



Kalibratie rookgasanalyse



Seminars en workshops



Kalibratie thermografie

Wijzigingen voorbehouden EURO-INDEX® NL 16003



NEderland
Rivium 2e straat 12
2909 LG Capelle a/d IJssel
T: 010 - 2 888 000
F: 010 - 2 888 010
verkoop@euro-index.nl
www.euro-index.nl



België
Leuvensesteenweg 607
1930 Zaventem
T: +32 - (0)2 - 757 92 44
F: +32 - (0)2 - 757 92 64
info@euro-index.be
www.euro-index.be